


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

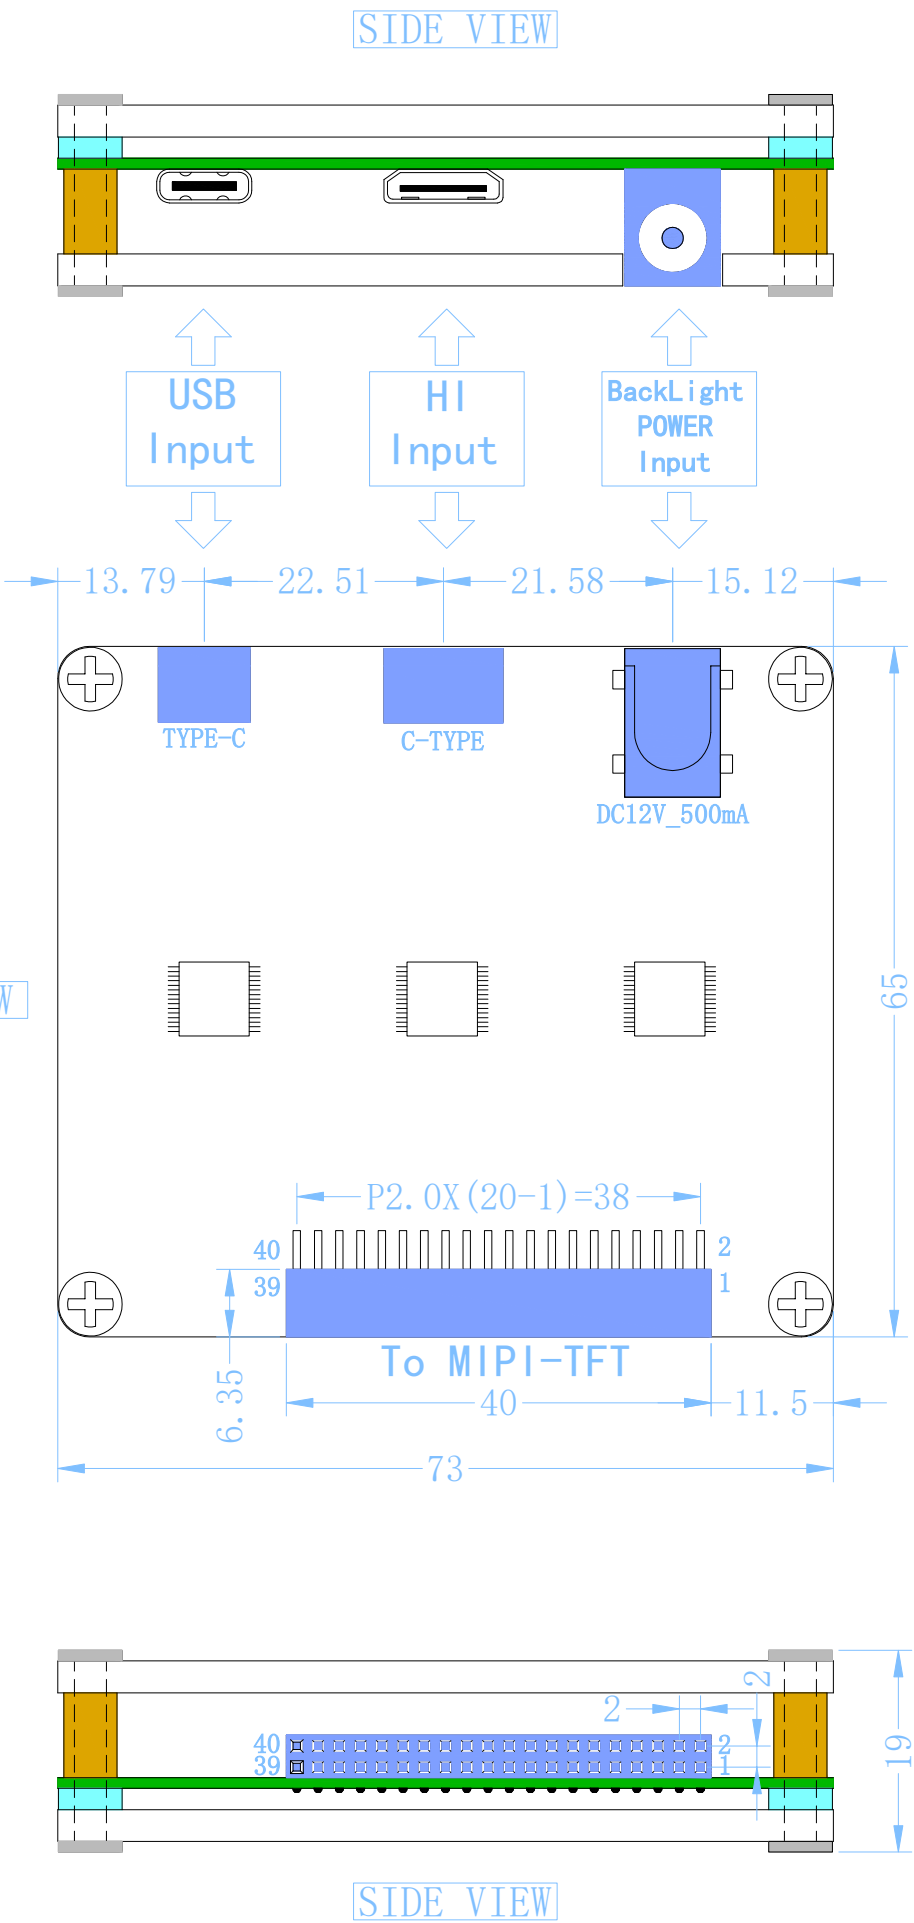

TOP VIEW

SIDE VIEW

SIDE VIEW



接口 Interface	HI (comp. hd C-type), USB type-c, DC-050	TFT 工作温度 TFT Operating Temp	-20 ℃ ~ +70 ℃	产品型号 Product model	HT-Hdm2Mipi-T v0.0 测试盒
工作电压 Operating Voltage	VCC = 5V (USB)	TFT 储存温度 TFT Storage Temp	-30 ℃ ~ +80 ℃	比例 Scale	1:1
环保 ROHS	ROHS	背光驱动条件 Backlight conditions	Vf= 12V (/5V), If= 600 mA	设计制图 Design	YE
				单位 Unit	MM
				公差 Tol.	±0.3
				日期 Date	2025-3-25
				版本 Ver	V00